



# PVC BIGBUILD GUTTER D Shape 4M

distributed by



## INSTALLATION INSTRUCTIONS

- Measure total length of gutters needed, as well as the correct number of brackets.
- Brackets are needed every 45cm - 60cm.
- If gutter length is 12m or more, position the outlet in the middle.
- If less, then position the outlet at one end.
- Measure and mark the highest point of the gutter run 3cm - 3.2cm below the roof flashing.
- Locate the end point of the gutter run.
- Calculating a drop of 0.6cm for every 3m of gutter, cut the gutter to size using a hacksaw.
- Attach the gutter brackets by snapping them onto the gutters.
- Join the outlet and end caps to the gutter and any joiners if necessary.
- Use a silicone sealer if required.
- Mount the gutter brackets, making sure your bolt and nut will penetrate the Fascia board.
- Attach a downpipe to the outlet, facing downwards.
- Seal any gutter connections with a sealant and allow to dry overnight.

## ADVANTAGES OF BIGBUILD GUTTERS


Quick & Easy to Install  
Light in Weight  
Recyclable  
UV Protected  
Low Maintenance  
Weather Resistant  
Non Flammable  
Corrosion Resistant  
10 Year Warranty



**SANS 11**  
APPROVED PRODUCT



FACTORY RATED

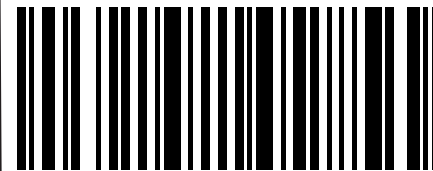

PVC BIGBUILD GUTTER D-SHAPE 4M