



PVC BIGBUILD GUTTER

Half Round 3M

distributed by 
plastic sales
plumbing sales

INSTALLATION INSTRUCTIONS


- Measure total length of gutters needed, as well as the correct number of brackets.
- Brackets are needed every 45cm - 60cm.
- If gutter length is 12m or more, position the outlet in the middle.
- If less, then position the outlet at one end.
- Measure and mark the highest point of the gutter run 3cm - 3.2cm below the roof flashing.
- Locate the end point of the gutter run.
- Calculating a drop of 0.6cm for every 3m of gutter, cut the gutter to size using a hacksaw.
- Attach the gutter brackets by snapping them onto the gutters.
- Join the outlet and end caps to the gutter and any joiners if necessary.
- Use a silicone sealer if required.
- Mount the gutter brackets, making sure your bolt and nut will penetrate the Fascia board.
- Attach a downpipe to the outlet, facing downwards.
- Seal any gutter connections with a sealant and allow to dry overnight.

ADVANTAGES OF BIGBUILD GUTTERS

Quick & Easy to Install
Light in Weight
Recyclable
UV Protected
Low Maintenance
Weather Resistant
Non Flammable
Corrosion Resistant
10 Year Warranty


SANS 11
APPROVED PRODUCT


FACTORY RATED

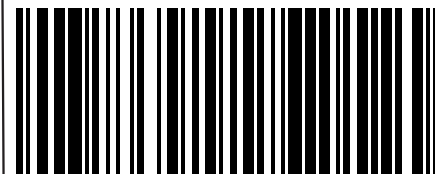

PVC BIGBUILD GUTTER Half Round 3M